

AUTO SPOTTER



ASI-14000T-2

Specifications


Input Power :	220V/ 380V	3 phase
Rated Input Power (100%)	65 KVA	
Rated Input Power (50%)	22 KVA	
Inverter frequency	2000 Hz	
Secondary Maximum		
Welding current	12000 A DC	
Secondary No Loading		
Power	1V~26V	
Dimension (welder)	300(w) x 500(D) x 480mm(H)	
Welder on the cabinet	625(w) x 860(D) x 1370mm(H)	
Weight	115 kgs (total)	

Standard Accessories



OPTIONS

Water Cooled
X Gun

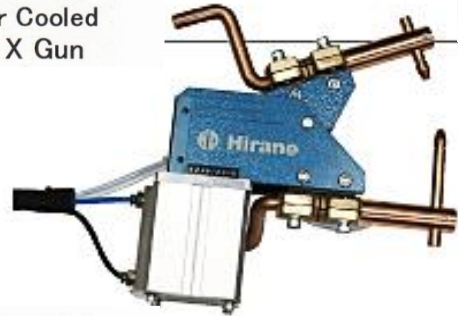

U shaped Arms



450mm/Wide Arm



Single Spot Holder



Hirane Co.,Ltd.

4-10-19 Yagumo, Meguro-ku, Tokyo.Japan
Tel:+81-3-3411-3331 Fax:+81-3-3421-0778